






Waveguide Switch - MM Series - TTL - WR28

REV. A

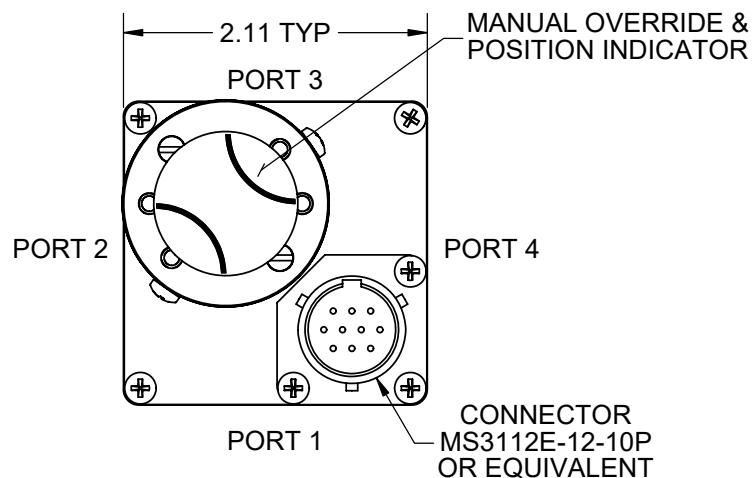

4X FLANGE MOUNTING HOLES
4-40 UNC - 2B ∇ .19
TYP ALL PORTS
(metric threads available)

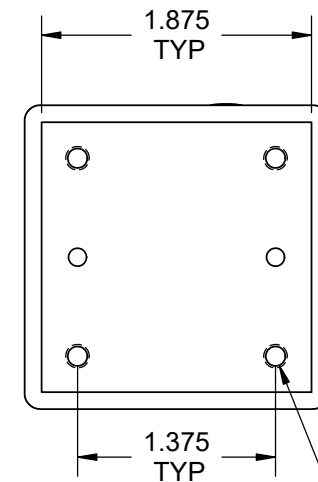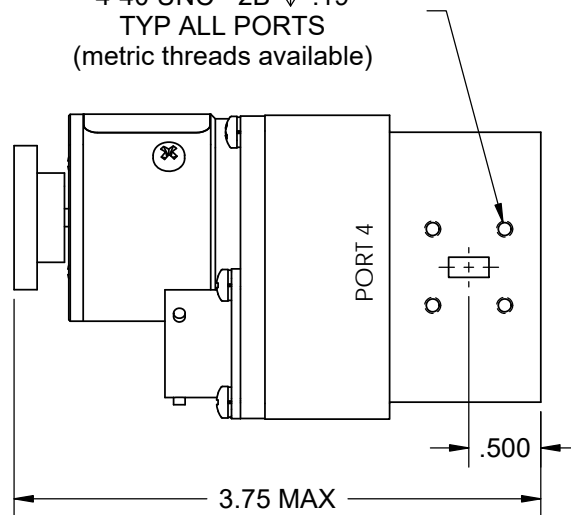

MOUNTING HOLES
8-32 UNC - 2B ∇ .31
(metric threads available)

Operating Notes:

- Active logic switch command duration must be greater than 100 mS.
- Maximum switching rate not to exceed 30 per minute.
- Supply to Pin D (Pos. 1) or Pin F (Pos. 2) is 3.0 to 5.5 Vdc. Current draw is 5 mA @ 5 Vdc.

(See Model # Chart to select options)

Frequency: 26.5 to 40.0 GHz
VSWR: 1.15:1 Max.
Insertion Loss: 0.15 dB Max.
Isolation: 55 dB Min.


Flange: See Flange Table
Voltage: See Voltage Table
Switching Time: 80 mS Max.

Material: Aluminum (RF Assy)
Finish: Iridite per MIL-DTL-5541
Paint Dull Black Enamel
Pressure: 30 PSIG (RF Head Only)
Drive: Patented Logus I Motor


Temp: Operating: -40°C to +85°C
Non-Operating: -55°C to +100°C
Humidity: 0 to 95%, No Condensation

ELECTRICAL CIRCUIT OPTIONS
NO INDICATORS
1 SET INDICATORS
2 SETS INDICATORS
3 SETS INDICATORS
4 SETS INDICATORS
INHIBIT CIRCUITS

FLANGE OPTIONS
COVER
GROOVE
CHOKE



DRIVE OPTIONS	VOLTAGE OPTIONS
LATCHING	12 VDC
PULSE	15 VDC
LATCHING	24 VDC
FAILSAFE	28 VDC
	48 VDC
	115 VAC

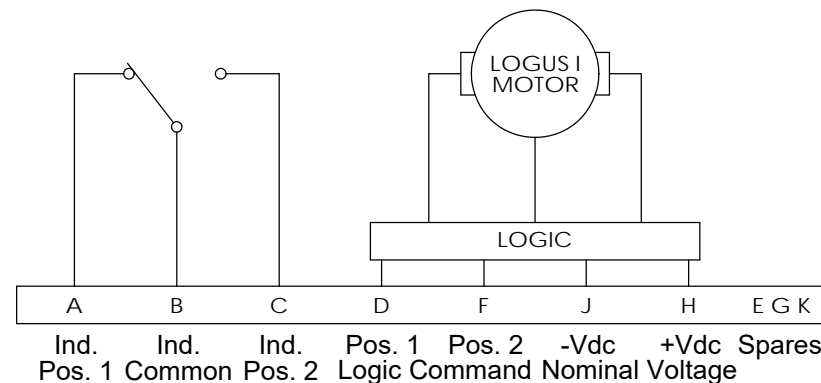

LATCHING, TTL SHOWN IN POSITION 1

(See Schematic page for optional Electrical Circuits)

RoHS Available